



■ 特性

■ Characteristic




- 国际通用全范围交流输入
- 符合 EMC 电磁兼容标准
- 具有过流及短路保护
- 过压/过温/过负载保护
- 带 PFC 功率因数校正
- 全铝外壳散热可选择温控风冷
- LLC 双管谐振拓扑效率最高达 95%
- CH1 最大输出电流 20A. 最大输出功率 480W. 电压可根据客户要求
- CH1 maximum current 20 a maximum power 480 w voltage can according to customer's requirements
- CH2 最大输出电流 2A. 最大输出功率 24W. 电压可根据客户要求
- CH2 maximum current 2 a. Maximum power 24 w. voltage can according to customer's requirements

电气规格 SPECIFICATOIN


型号 MODEL		PF-480-2412		PF-480-4812		PF-480-5212	
输出 Output	输出通道 Output channel	CH1	CH2	CH1	CH2	CH1	CH2
	直流电压 DC Voltage	24V	12V	48V	12V	52V	12V
	额定电流 Rated Current	20A	2A	10A	2A	9.2A	2A
	电流范围 Current Range	0~20A	0~2A	0~10A	0~2A	0~9.2	0~2A
	额定功率 Rated Power	480W	24W	480W	24W	480W	24W
	波纹与噪声最大(备注2) Ripple & Noise Max (Note2)	240mVp-p	120mVp-p	240mVp-p	120mVp-p	240mVp-p	120mVp-p
	电压调整范围 Voltage Adj. Range	±10%	±10%	±10%	±10%	±10%	±10%
	电压精度(备注3) Voltage Tolerance (Note 3)	±5%	±5%	±5%	±5%	±5%	±5%
	线性调整率(备注4) Line Regulation (Note 4)	±1%	±1%	±1%	±1%	±1%	±1%
	负载调整率(备注5) Load Regulation (Note 5)	+2.5%	+2.5%	+2.5%	+2.5%	+2.5%	+2.5%
启动、上升时间 Setup、Rise Time	800ms, 50ms/220Vac (满载时 Full load)						
保持时间 (Typ.) Hold up time (Typ.)	30ms/220Vac (满载时 Full load)						
输入 Input	电压范围 Voltage Range	100~264Vac					
	频率范围 Frequency Range	50/60Hz					
	效率 (Typ.) Efficiency (Typ.)	92%		93%		93%	
	功率因数 (Typ.) The power factor (Typ.)	0.95>230VAC		0.99>110VAC			
	交流电流 (Typ.) Ac Current (Typ.)	2.7A/230Vac		5.5A/115Vac(满载时 Full load)			
	浪涌电流 (Typ.) Inrush Current (Typ.)	冷启动 Cold Start: 50A/220Vac					
漏电流 (Typ.) Leakage Current (Typ.)	<1.5MA/240VAC						
保护 Protection	过载保护 Over load protection	110%~150% 保护模式: 打嗝模式, 负载异常条件移除后可自动恢复 Protection type: Hiccup mode, recovers automatically after fault condition is removed					
	过压保护 Over Voltage protection	115%~150% 保护模式: 打嗝模式, 过压异常条件移除后可自动恢复 Protection type: Hiccup mode, recovers automatically after fault condition is removed					
	过温保护 Over-temperature protection	保护模式: 晶体内部接点温度超过 140℃, 关闭输出, 当温度恢复正常可自动恢复 Protected Mode: crystal internal contact temperature exceeds 140 °C, turn off the output, when the temperature returns to normal automatic recovery					
环境 Environment	工作温度 Working Temp	-30℃~60℃(请参照“减额曲线” Refer to "derating curve")					
	工作湿度 Working Humidity	20~90%RH, 无冷凝 non-condensing					
	储存温度、湿度 Storage Temp、Humidity	-30℃~75℃ 10~98%RH, 无冷凝 non-condensing					
	温度系数 Temp Coefficient	±0.03% /℃ (0~50℃) (+5V)					
	耐振荡 Vibration	10~500Hz, 5g 10分钟/周期, X、Y、Z 轴各 60分钟 10Min/1 cycle, period for 60min, each along X, Y, Z axes					
安规和电磁兼容 (备注7) Safety & EMC (Note 7)	安全规范备注6 Safety Standards Note 6	GB4943, EN60950					
	耐压 Withstand Voltage	I/P-O/P: 3.0KVAC I/P-FG: 1.5KVAC O/P-FG: 0.5KVAC					
	绝缘阻抗 Isolation Resistance	I/P-O/P I/P-FG O/P-FG: 100M Ohms/500VDC/25℃/70%RH					
	电磁兼容发射 EMI Conduction Radiation	符合 Compliance to: EN55022, EN61000-3-2, 3. FCC part15, GB9254 class B, GB17625.1					
其它 Others	电磁兼容抗扰度 EMS Immunity	符合 Compliance to: EN61000-4-2, 3, 4, 5, 6, 8, 11, A 级轻工业标准 light industry level, criteria A					
	MTBF	≥100000h.					
备注 Note	尺寸 Dimension/包装 Packing	220*99.6*37.8mm(L*W*H) /0.9KG; 16pcs/14.5Kg					
	1. 如未特别说明, 所有规格参数均在输入为 220VAC、额定负载、25℃环境温度下进行测量。 All parameters NOT specially mentioned are measured at 220VAC input, rated load and 25℃ of ambient temperature. 2. 波纹和噪声测量方法: 使用一条 12" 双绞线, 同时终端要并联 0.1uF 和 47uF 的电容, 在 20MHZ 带宽下进行量测。 Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor 3. 精度: 包含设定误差, 线性调整率和负载调整率。 Tolerance: includes set up tolerance, line regulation and load regulation 4. 线性调整率测量方法: 在额定负载下, 从低电压到高电压测试。 Line regulation is measured from low line to high line at rated load. 5. 负载调整率测量方法: 从 0% 到 100% 额定负载。 Load regulation measurement: from 0% to rated load of 100% 6. 按照 GB4943.1 的要求, 电源仅适用于海拔 2000 米以下地区和非热带气候条件下安全使用。 According to the requirements of GB4943.1, power is only elevation 2000 meters area and the safe use of the tropical climate conditions. 7. 电源被视为系统内元件的一部分, 需结合终端设备进行电磁兼容相关确认。 The power supply is considered part of the system components, to be with terminal equipment related to electromagnetic compatibility Relevant confirmation.						

尺寸 Size


单位: mm

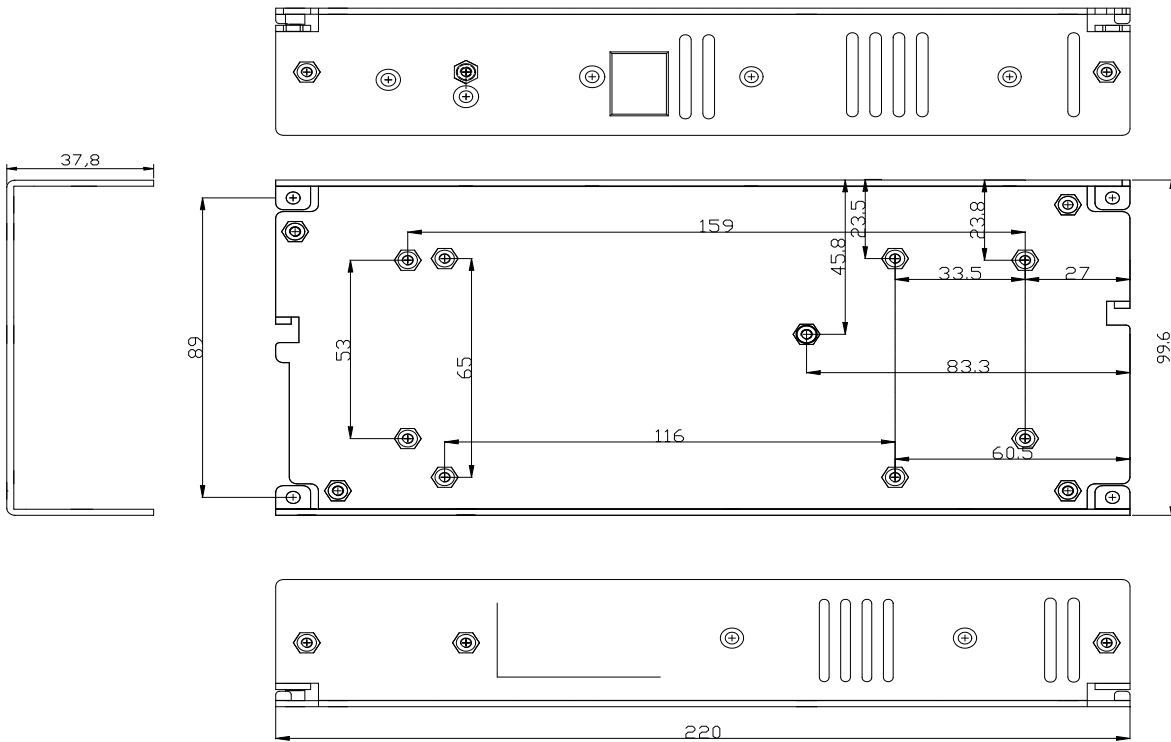

方框图 Block diagram

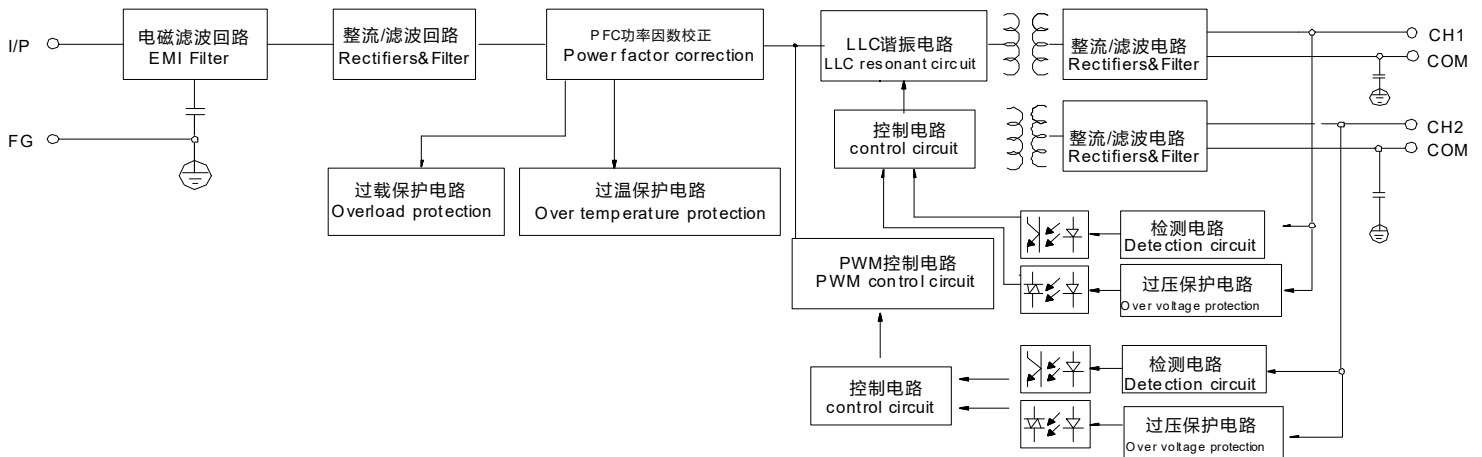

减额曲线 Deduction curve

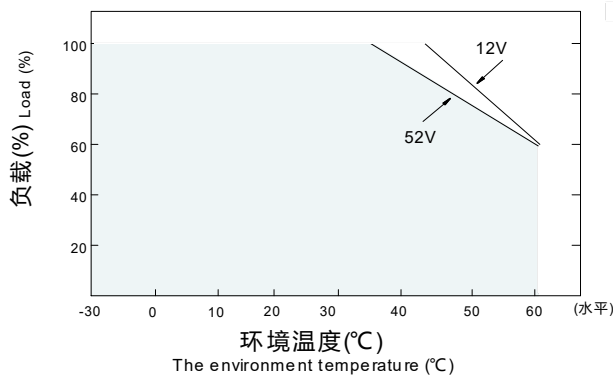

静态特性曲线 The static characteristic curve

