


■ 特性
■ Characteristic


- 国际通用全范围交流输入
 - 适合 POE 交换机内置供电
 - 过压/过温/过负载保护
 - 100%负载老化
 - 冷却方式：自冷
 - 高效率，长寿命和高信赖度
 - 可根据用户参数生产
- International Universal AC input/ Full range
 - Suitable for POE switch built-in power supply
 - Over voltage& temperature & Load Protections
 - 100% full load burn-in test
 - Cooling: Self-cooling
 - High efficiency, long life and high reliability
 - Can be customized according to user selection

电气规格 SPECIFICATOIN

型号 Model		POE-65W-12	POE-65W-15	POE-65W-24	POE-65W-48	POE-65W- 52
输出 Output	直流电压 DC Voltage	12V	15V	24V	48V	52V
	额定电流 Rated Current	5A	4.3A	2.7A	1.35A	1.25A
	电流范围 Current Range	0-5A	0-4.3A	0-2.7A	0-1.35A	0-1.25A
	额定功率 Rated Power	65W	65W	65W	65W	65W
	波纹和噪声(最大)备注2 Ripple & Noise Max Note	120MV	150MV	240MV	480MV	480MV
	电压精度备注3 Voltage Tolerance Note 3	±5%	±5%	±5%	±5%	±5%
	线性调整率备注4 Line Regulation (Note 4)	±1%	±1%	±1%	±1%	±1%
	负载调整率备注5 Load Regulation (Note 5)	±5%	±5%	±5%	±5%	±5%
启动, 上升, 保持时间 Setup、Rise Time		500ms 200ms 30ms 满载时 Full load				
输入 Input	电压范围 Voltage Range	110Vac~264Vac				
	频率范围 Frequency Range	50/60Hz				
	效率最大 Efficiency (Typ.)	85%		86%	87%	88%
	交流电流 Ac Current (Typ.)	1A/230VAC				
	浪涌电流最大 Inrush Current (Typ.)	30A/230VAC				
漏电流最大 Leakage Current (Typ.)	0.75Ma/240VAC					
保护 Protection	过负载 Over Load	额定输出功率的 Rated output power: 110%~170% 保护模式: 打嗝模式, 负载异常条件移除后可自动恢复 Protection type: Hiccup mode, recovers automatically after fault condition is removed				
	过电压 Over Voltage	额定输出电流的 Rated output Voltage: 115%~175% 保护模式: 二极管钳位 Protection mode: diode clamp				
	过温度备注5 Over Temp (Note 5)	晶体内部接点温度超过 140℃, 启动过温保护。 Crystal internal contact temperature exceeds 140 °C, start over temperature protection. 保护模式: 关闭输出电压, 温度下降后自动恢复 Protection mode: turn off the output voltage, the temperature drops automatically resume				
环境 Environment	工作温度 Working Temp	-0℃~50℃ (请参照“减额曲线” Refer to "Derating curve")				
	工作湿度 Working Humidity	0~90%RH, 无冷凝 non-condensing				
	储存温度、湿度 Storage Temp、Humidity	-10℃~75℃ 10~98%RH, 无冷凝 non-condensing				
	温度系数 Temp. Coefficient	±0.03%/℃ (0~50℃)				
	耐震荡 Vibration	10~500Hz, 5G 10分钟/周期, X、Y、Z轴各60分钟 10Min/1 cycle, period for 60min, each along X,Y,Z axes				
安规和电磁兼容 备注7 Safety & EMC Note 7	安全规范 Safety Standards	GB4943, EN60950				
	耐压 Withstand Voltage	I/P-0/P: 1.5kVac				
	绝缘抗阻 Isolation Resistance	I/P-0/P: 100M Ohms/500VDC/25℃/70%RH				
	电磁兼容发射 EMI Conduction Radiation	符合 Compliance to :EN55022, EN61000-3-2, 3, FCC part15, GB9254 class B, GB17625.1				
其它 Others	电磁兼容抗扰度 EMS Immunity	符合 Compliance to :EN61000-4-2, 3, 4, 5, 6, 8, 11, A 级轻工业标准 light industry level, criteria A				
	寿命 Life	1年: 100%负载, 30℃, 8小时/天 2 years: 100% load, 30, 8 hours / day				
连接器 Connector	尺寸 Dimension	96*55*29mm (L*W*H)				
	插头 Plug/配线 Wiring	详见第二页, 其它型号可依客户需求订制 For second pages, other models can be customized according to customer requirements.				
备注 Note	1. 如未特别说明, 所有规格参数均在输入为 230VAC、额定负载、25℃环境温度下进行测量。 If no special instructions are specified, all the specifications are measured at the input of 230VAC, the rated load, the ambient temperature of 25℃.					
	2. 波纹和噪声测量方法: 使用一条 12"双绞线, 同时终端要并联 0.1uF 和 47uF 的电容, 在 20MHZ 带宽下进行测量。 Ripple and noise measuring method: using a 12 "twisted pair, at the same time terminal to parallel 0.1uF and 47uF capacitor, in the 20MHZ bandwidth measurement.					
	3. 精度: 包含设定误差, 线性调整率和负载调整率。 Curacy: contains setting error, linear adjustment rate and load adjustment rate.					
	4. 线性调整率测量方法: 在额定负载下, 从低电压到高电压测试。 Linear adjust rate measurement: at rated load, from a low voltage to a high voltage test.					
	5. 负载调整率测量方法: 从 10%到 100%。 Load adjustment rate measurement method: from 20% to 100%					
	6. 过温保护是由控制 IC 的功能决定。 Overtemperature protection is determined by the function of the control IC.					

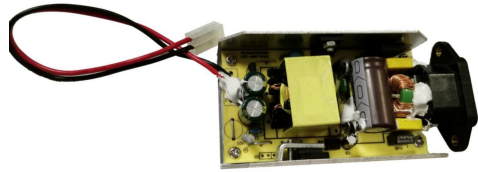